


# PRODUCT SPECIFICATIONS

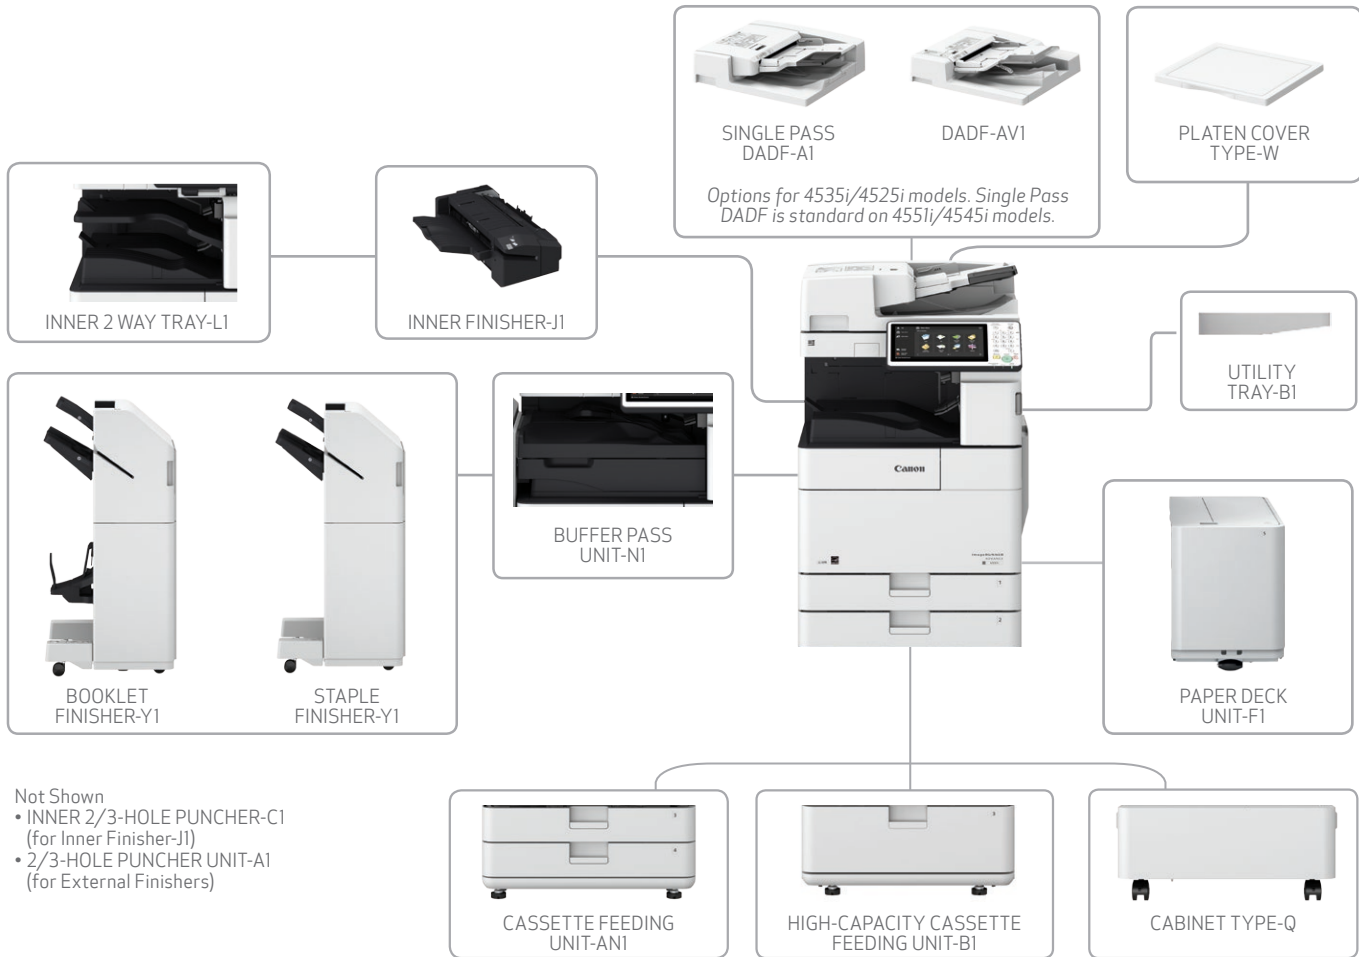

Not Shown  
 • INNER 2/3-HOLE PUNCHER-C1 (for Inner Finisher-J1)  
 • 2/3-HOLE PUNCHER UNIT-A1 (for External Finishers)

## Main Unit

**Type**  
Monochrome Laser Multifunctional

**Core Functions**  
Standard: Print, Copy, Scan, Send, Store  
Optional: Fax

**Processor**  
Canon Dual Custom Processor (Shared)

**Control Panel**  
10.1" TFT LCD WSVGA Color Touch-panel

**Memory**  
3.0 GB RAM

**Hard Disk Drive**  
Standard: 250 GB  
Maximum: 1 TB

## Mirroring Hard Disk Drive

Optional (250 GB, 1 TB)  
Method: Raid1

## Print Resolution

1200 dpi x 1200 dpi

## Interface Connection

**Network**  
Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)  
Optional: NFC, Bluetooth

**Others**  
Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device)  
Optional: Serial Interface, Copy Control Interface

## Paper Capacity (LTR, 20 lb. Bond)

Standard: 1,180 Sheets  
Maximum: 6,330 Sheets

## Paper Sources (LTR, 20 lb. Bond)

**Standard:** Two 550-sheet Paper Cassettes, 80-sheet Stack Bypass

**Optional:** Two 550-sheet Paper Cassettes (Cassette Feeding Unit-ANI), 2,450-sheet Paper Deck (High Capacity Cassette Feeding Unit-BI), 2,700-sheet Paper Deck (Paper Deck Unit-F1)

## Paper Output Capacity (LTR, 20 lb. Bond)

**Standard:** 250 Sheets  
**Maximum:** 3,350 Sheets (with External Finishers)

## Finishing Capabilities

**Standard:** Collate, Group

**With Inner Finisher:** Collate, Group, Offset, Staple, Hole Punch,<sup>1</sup> Staple-Free Staple, Staple On Demand

**With External Finisher:** Collate, Group, Offset, Staple, Booklet,<sup>2</sup> Staple-Free Staple, Staple On Demand, Hole Punch<sup>3</sup>



## Supported Media Types

Paper	Thin, Plain, Recycled, Color, Heavy,
Cassettes:	Pre-punched
Stack Bypass:	Thin, Plain, Recycled, Color, Heavy, Pre-punched, Bond, Transparency, Label, Envelope

## Supported Media Sizes

Paper	Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 15-3/8")
Cassette (1):	
Paper	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 15-3/8")
Cassette (2):	
Stack Bypass:	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")

## Supported Media Weights

Paper	
Cassettes:	16 lb. Bond to 34 lb. Bond (60 to 128 g/m <sup>2</sup> )
Stack Bypass:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m <sup>2</sup> )
Duplexing:	16 lb. Bond to 28 lb. Cover (60 to 105 g/m <sup>2</sup> )

## Warm-up Time

From Power On:	24 Seconds or Less
From Deep Sleep Mode:	10 Seconds or Less
Quick Startup Mode:	4 Seconds <sup>4</sup>

## Dimensions (W x D x H)

23-1/8" x 29-1/8" x 47" (587 mm x 740 mm x 1,193 mm)<sup>5</sup>

## Installation Space (W x D)

Basic [With ADF (Stack Bypass and Cassette Drawers Open)]: 35" x 46-1/2" (889 mm x 1,182 mm)  
Fully Configured [With ADF+Paper Deck Unit-F1+Booklet Finisher-Y1 (Cassette Drawers Open)]:  
71-3/8" x 50-3/8" (1,811 mm x 1,280 mm)

## Weight

Approx. 240.7 lb. (109.2 kg)<sup>6</sup>

## Print Specifications

### Print Speed

4551i:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

### Standard Page Description Languages

UFR II, PCL<sup>®</sup>6, Adobe<sup>®</sup> PS<sup>®</sup> 3

### Direct Print

Available from USB, Advanced Box, Remote UI, and Web Access (Opt.)<sup>7</sup>

### Supported File Types for Direct Print

PDF, TIFF, JPEG, EPS, XPS

### Printing from Mobile Devices and Cloud-based Services

A range of software and MEAP-based solutions are available to provide printing from mobile devices or Internet-connected devices and cloud-based services depending on your requirements.

### Fonts

PCL fonts:	93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T (Japanese, Korean, Simplified and Traditional Chinese), <sup>8</sup> Barcode Fonts <sup>9</sup>
PS fonts:	136 Roman

## Operating System<sup>10</sup>

UFR II:	Windows Vista <sup>®</sup> /Server 2008/Windows <sup>®</sup> 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.6.8 or later)
PCL:	Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10
PS:	Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.6.8 or later)
PPD:	MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows 8.1/Windows 10

## Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Forced Hold Printing, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Toner Reduction, Poster Printing

## Copy Specifications

### Copy Speed

4551i:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

### First-Copy-Out Time (Letter)

4551i:	As fast as 3.7 seconds
4545i:	As fast as 3.8 seconds
4535i:	As fast as 3.8 seconds
4525i:	As fast as 5.2 seconds

### Copy Resolution

Reading:	Up to 600 dpi x 600 dpi
Printing:	1200 dpi x 1200 dpi

### Multiple Copies

Up to 999 copies

### Copy Exposure

Automatic or Manual (9 Levels)

### Magnification

25%-400% (1% Increments)

### Preset Reductions

25%, 50%, 64%, 73%, 78%

### Preset Enlargements

121%, 129%, 200%, 400%

### Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper Setting, Previous Settings, Favorite Settings, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

### Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Detect Feeder Multi Sheet Feed, Free Size Original

## Scan Specifications

### Type

4551i/4545i:	Standard Single Pass Duplexing Automatic Document Feeder
4535i/4525i:	Optional Single Pass Duplexing Automatic Document Feeder or Duplexing Automatic Document Feeder

### Document Feeder Paper Capacity

Single Pass DADF-A1: 150 Sheets (20 lb. Bond)  
DADF-AV1: 100 Sheets (20 lb. Bond)

### Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

### Document Feeder Supported Media Weights

Single Pass DADF-A1	
BW Original:	13 lb. Bond to 58 lb. Cover (50 to 157 g/m <sup>2</sup> )
CL Original:	17 lb. Bond to 58 lb. Cover (64 to 157 g/m <sup>2</sup> )
DADF-AV1	
BW Original:	13 lb. Bond to 34 lb. Bond (50 to 128 g/m <sup>2</sup> )
CL Original:	17 lb. Bond to 34 lb. Bond (64 to 128 g/m <sup>2</sup> )

### Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2 kg)]

### Pull Scan

Color Network ScanGear2 for both Twain and WIA

Supported OS:	Windows Vista/7/8/8.1/10 Windows Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2
---------------	---

### Scan Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100 dpi

### Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to mobile devices and cloud-based services depending on your requirements.

### Scan Speed (Letter)

Single Pass DADF-A1	
Single-sided Scanning (BW):	80 ipm (300 dpi)/80 ipm (600 dpi)
Single-sided Scanning (Color):	80 ipm (300 dpi)/60 ipm (600 dpi)
Double-sided Scanning (BW):	160 ipm (300 dpi)/150 ipm (600 dpi)
Double-sided Scanning (Color):	160 ipm (300 dpi)/80 ipm (600 dpi)
DADF-AV1	
Single-sided Scanning (BW):	70 ipm (300 dpi)/51 ipm (600 dpi)
Single-sided Scanning (Color):	70 ipm (300 dpi)/51 ipm (600 dpi)
Double-sided Scanning (BW):	35 ipm (300 dpi)/25.5 ipm (600 dpi)
Double-sided Scanning (Color):	35 ipm (300 dpi)/25.5 ipm (600 dpi)

## Send Specifications

### Destination

E-mail/Internet Fax (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 Fax (Optional), IP Fax (Optional)

### Color Mode

Automatic-Color Select (Full Color/Grayscale), Automatic-Color Select (Full Color/Black-and-White), Full color, Grayscale, and Black-and-White

### Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

### Send Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100dpi

### Communication Protocol

File: FTP, SMB v3.0, WebDAV

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

### File Format

Standard: TIFF, JPEG, PDF(Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b), XPS (Compact, Searchable), Office Open XML (PowerPoint®, Word)

Optional: PDF (Trace & Smooth, Encrypted), PDF/XPS (Digital Signature)

### Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Detect Feeder Multi Sheet Feed

## Fax Specifications

### Maximum Number of Connection Lines

4

### Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

### Compression Method

MH, MR, MMR, JBIG

### Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

### Sending/Recording Size

Statement-R to 11" x 17"

### Fax Memory

Up to 30,000 pages

### Speed Dials

Max. 200

### Group Dials/Destinations

Max. 199 dials

### Sequential Broadcast

Max. 256 addresses

### Memory Backup

Yes

### Fax Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Sender's Name (TTI), Select Line, Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

## Store Specifications

### Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

### Advanced Box

Communication Protocol: SMB or WebDAV

Supported

Client PC: Windows (Windows Vista/7/8/8.1/10)

Concurrent Connections (Max.)

SMB: 64

WebDAV: 3 (Active Sessions)

### Advanced Box Available Disk Space

Approx. 16 GB (Standard HDD)

Approx. 480 GB (1 TB HDD)

### Advanced Box Features:

Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

### Memory Media

Standard: USB

## Security Specifications

### Authentication

Standard: Universal Login Manager, User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in

Optional: uniFLOW

### Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS140-2 Validated)

Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

### Network

Standard: IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

### Document

Standard: Secure Print, Forced Hold Printing, Adobe LiveCycle® Rights Management ES2.5 Integration

Optional: Encrypted PDF, Encrypted Secure Print, User and Device signatures, Secure Watermarks, Document Scan Locking

## Environmental Specifications

### Operating Environment

Temperature: 50 to 86°F

Humidity: 20 to 80% RH (no condensation)

### Power Requirements

4551i: 120-127 V AC, 60 Hz, 10.4A

4545i/4535i: 120-127 V AC, 60 Hz, 9.3A

4525i: 120-127 V AC, 60 Hz, 7A

### Plug (Main Unit)

NEMA 5-15P

### Power Consumption

Maximum

Approx. 1.5 kWh

Standby: Approx. 38 W

Sleep Mode: Approx. 0.9 W<sup>11</sup>

Typical Electricity Consumption (TEC) Rating:

4551i: 2.5 kWh

4545i: 2.2 kWh

4535i: 1.8 kWh

4525i: 1.0 kWh

### Standards

ENERGY STAR® Certified

Rated EPEAT® Gold<sup>12</sup>

RoHS Compliant

## Consumables

### Toner

GPR-57 Toner BK

### Toner Yield (Estimated @ 6% Coverage)

Black: 42,100 Images

## Paper Supply Options

### CASSETTE FEEDING UNIT-A1

Paper 550 Sheets x 2 Cassettes

Capacity: [20 lb. Bond (80 g/m<sup>2</sup>)]

Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched

Paper Size: 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, and Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 17" (139.7 x 182.0 to 297.0 x 431.8 mm)]

Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m<sup>2</sup>)

Power Source: From the Main Unit

Dimensions 22-1/4" x 25-5/8" x 9-3/4"

(W x D x H): (565 mm x 650 mm x 248 mm)

Weight: 51.8 lb. (23.5 kg)

### HIGH CAPACITY CASSETTE FEEDING UNIT-B1

Paper 2,450 sheets [20 lb. Bond (80 g/m<sup>2</sup>)]

Capacity:

Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched

Paper Size: Letter

Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m<sup>2</sup>)

Power Source: From the Main Unit

Dimensions 22-1/4" x 25-5/8" x 9-3/4"

(W x D x H): (565 mm x 650 mm x 248 mm)

Weight: 61.7 lb. (28 kg)

### PAPER DECK UNIT-F1

Paper 2,700 Sheets [20 lb. Bond (80 g/m<sup>2</sup>)]

Capacity:

Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched

Paper Size: Letter

Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m<sup>2</sup>)

Power Source: From the Main Unit

Dimensions 15-3/4" x 24-7/8" x 17-3/8"

(W x D x H): (400 mm x 630 mm x 440 mm)

Weight: 68.3 lb. (31 kg)

## Output Options

### INNER 2-WAY TRAY-L1

Number of Trays:	2
Total Output Capacity	
Upper Tray:	100 Sheets
Lower Tray:	250 Sheets
Paper Weight	14 lb. Bond to 80 lb. Cover (52 to 220 g/m <sup>2</sup> )
Paper Size (Standard):	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")
Dimensions (W x D x H):	16-3/4" x 16-1/4" x 4-1/4" (426 mm x 413 mm x 17 mm)
Weight:	1.7 lb (0.77 kg)

### INNER FINISHER-J1

Number of Trays:	2
Top Tray Capacity:	Letter/Statement-R/Executive (45 Sheets), 11" x 17"/Legal/Letter-R (45 Sheets)
Lower Tray Capacity:	Letter/Statement-R/Executive (500 Sheets), 11" x 17"/Legal/Letter-R (250 Sheets)
Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m <sup>2</sup> )

Staple Position: Corner, Double

Staple Capacity  
Corner Staple and Double Staple

Letter/Executive: 50 Sheets (14 to 24 lb. Bond)  
11" x 17"/Legal/Letter-R: 30 Sheets (14 to 24 lb. Bond)

Staple-Free Staple:  
11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m<sup>2</sup>))  
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m<sup>2</sup>)]  
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m<sup>2</sup>)]

Staple On Demand: 40 Sheets [20 lb. Bond (80 g/m<sup>2</sup>)]

Power Source: From the Main Unit

Dimensions (W x D x H): 25" x 21-1/8" x 8-1/8" (636 mm x 535 mm x 205 mm)<sup>13</sup>

Weight: Approx. 15.9 lb (7.2 kg)

### STAPLE FINISHER-Y1 (External)

Number of Trays:	2
Top Tray Capacity:	Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray Capacity:	Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)
Paper Weight	
Top Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m <sup>2</sup> )
Lower Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m <sup>2</sup> )

Staple Position: Corner, Double

Staple Capacity  
Corner Staple and Double Staple

Letter/Executive: 50 Sheets [24 lb. Bond (90 g/m<sup>2</sup>)]  
11" x 17"/Legal/Letter-R: 30 Sheets [24 lb. Bond (90 g/m<sup>2</sup>)]

Staple-Free Staple  
11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m<sup>2</sup>))  
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m<sup>2</sup>)]  
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m<sup>2</sup>)]

Staple On Demand: 50 Sheets [24 lb. Bond (90 g/m<sup>2</sup>)]

Power Source: From the Main Unit

Dimensions (W x D x H): 25-1/8" x 24-1/2" x 45" (637 mm x 623 mm x 1,142 mm)<sup>13</sup>

Weight: Approx. 68.3 lb (31 kg)

### BOOKLET FINISHER-Y1 (External)

Number of Trays:	2
Top Tray Capacity:	Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray Capacity:	Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)

Paper Weight  
Top Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m<sup>2</sup>)  
Lower Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m<sup>2</sup>)

Staple Position: Corner, Double

Staple Capacity  
Corner Staple and Double Staple

Letter/Executive: 50 Sheets [24 lb. Bond (90 g/m<sup>2</sup>)]  
11" x 17"/Legal/Letter-R: 30 Sheets [24 lb. Bond (90 g/m<sup>2</sup>)]

Staple-Free Staple  
11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m<sup>2</sup>))  
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m<sup>2</sup>)]  
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m<sup>2</sup>)]

Staple On Demand: 50 Sheets [24 lb. Bond (90 g/m<sup>2</sup>)]

Booklet-Stitch Paper Size: 11" x 17", Legal, Letter-R, Custom Size (7-3/4" x 10-5/8" to 11-3/4" x 17")

Booklet-Stitch Staple Capacity: 20 Sheets x 10 Sets [22 lb. Bond (81 g/m<sup>2</sup>)] [including one cover sheet up to 80 lb. Cover (220 g/m<sup>2</sup>)]

Power Source: From the Main Unit

Dimensions (W x D x H): 25-1/8" x 24-1/2" x 45" (637 mm x 623 mm x 1,142 mm)<sup>13</sup>

Weight: Approx. 125.7 lb (57 kg)

### INNER 2/3-HOLE PUNCHER-C1

(Requires the Inner Finisher-J1)

Acceptable Punch Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m<sup>2</sup>)  
Acceptable Punch Paper Size

Two holes: 11" x 17", Legal, Letter, Letter-R, Executive  
Three holes: 11" x 17", Letter, Executive

Power Source: From the Main Unit

### 2/3-HOLE PUNCHER UNIT-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)

Acceptable Punch Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m<sup>2</sup>)  
Acceptable Punch Paper Size

Two holes: 11" x 17", Legal, Letter, Letter-R, Executive  
Three holes: 11" x 17", Letter, Executive

Power Source: From the Main Unit

## Additional Hardware Options

### Card Readers

MICARD PLUS PROXIMITY CARD READER  
COPY CARD READER-F1  
COPY CARD READER ATTACHMENT-B5

### Others

PLATEN COVER TYPE W  
ENVELOPE FEEDER ATTACHMENT KIT-D1  
UTILITY TRAY-B1  
USB KEYBOARD

## Security Options

### Document Security

DOCUMENT SCAN LOCK KIT-B1  
SECURE WATERMARK-B1  
ENCRYPTED SECURE PRINT SOFTWARE-D1  
iR-ADV SECURITY KIT-S1 FOR IEEE 2600 COMMON CRITERIA CERTIFICATION<sup>4</sup>

### Data Security

HDD MIRRORING KIT-J1  
2.5"/250 GB HDD-N1  
2.5"/1 TB HDD-P1  
REMOVABLE HDD KIT-AL1

## System and Controller Options

### Print Accessories

PCL INTERNATIONAL FONT SET-A1

### Barcode Printing

BARCODE PRINTING KIT-D1

### System Accessories

WEB ACCESS SOFTWARE-K1

SERIAL INTERFACE KIT-K3

COPY CONTROL INTERFACE KIT-A1

CONNECTION KIT-A1 FOR BLUETOOTH LE

NFC KIT-C1

MEAP WEB CONNECTION KIT-G3

### Fax Accessories

SUPER G3 FAX BOARD-AS2

SUPER G3 2ND LINE FAX BOARD-AS2

SUPER G3 3RD/4TH LINE FAX BOARD-AS2

REMOTE FAX KIT-A1

IP FAX EXPANSION KIT-B1

## Other Options

### Accessibility Accessories

ADF ACCESS HANDLE-A1

VOICE GUIDANCE KIT-G1

VOICE OPERATION KIT-D1

BRAILLE LABEL KIT-F1

### Consumables

STAMP INK CARTRIDGE-C1

STAPLE-P1

STAPLE CARTRIDGE-Y1

## Footnotes

<sup>1</sup> Requires the optional Inner 2/3 Hole Puncher-C1.

<sup>2</sup> Booklet Finisher-Y1 only.

<sup>3</sup> Requires the optional 2/3 Hole Puncher Unit-A1.

<sup>4</sup> Time from device power-on to when copy jobs can be programmed.

<sup>5</sup> Includes Main Unit, Single Pass DADF-A1, and Cassette Feeding Unit-AN1.

<sup>6</sup> Includes Main Unit, Single Pass DADF-A1, Cassette Feeding Unit-AN1, and consumables.

<sup>7</sup> PDF print from Web sites is supported.

<sup>8</sup> Requires the optional PCL International Font Set-A1.

<sup>9</sup> Requires the optional Barcode Printer Kit-D1.

<sup>10</sup> Other operating systems and environments including AS/400, UNIX, Linux and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.

<sup>11</sup> 0.9 W Sleep mode is not available in all circumstances due to certain settings.

<sup>12</sup> For current EPEAT rating (Gold/Silver/Bronze), please visit [www.epeat.net](http://www.epeat.net).

<sup>13</sup> When the extension tray is extended.

<sup>14</sup> Will launch at a later date.

USA.CANON.COM



Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance.

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imageRUNNER, imageWARE, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Google Cloud Print™ is either a registered trademark or trademark of Google Inc. AirPrint and the AirPrint logo are trademarks of Apple Inc. Adobe® and PostScript® 3™ are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft® and PowerPoint® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. PCL® is a registered trademark of Hewlett-Packard Company. All other referenced product names and marks are trademarks of their respective owners. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Specifications and availability subject to change without notice. Not responsible for typographical errors. ©2016 Canon U.S.A., Inc. All rights reserved.

1216-iRA45xxSSS-PDF-IH

